



LCD Video Wall



49" Narrow Bezel LCD Video wall

- Full HD (1920 x 1080) Resolution
- 3.5mm Combined Bezel
- Full Array LED Backlighting



Narrow Bezel LCD Video Wall

Delta's Ultra Narrow Bezel (UNB) LCD video wall features full HD resolution and direct LED backlights ensuring crystal clear image and long life. With a combined bezel width of 3.5mm, Delta's Ultra Narrow LCD provides a near seamless image, ideal for public venues and control rooms.

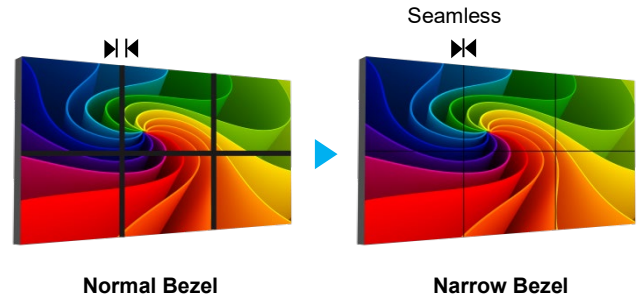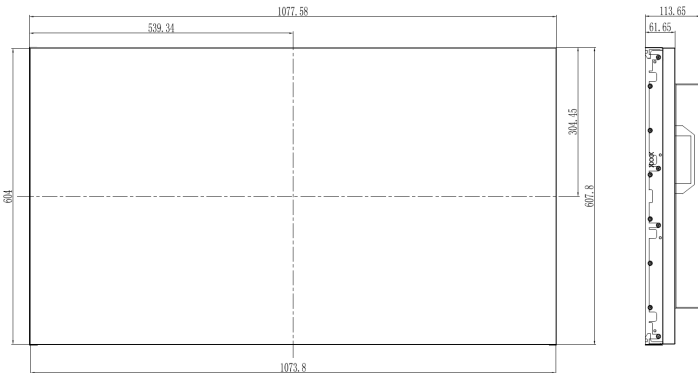

Specifications

Model	LW-4983 LR KC
Panel	49 inch Ultra Narrow Bezel
Bezel to Bezel	3.5mm
Back Light Type	Direct LED
Resolution	Full HD 1920 x 1080, professional-grade display
Pixel Pitch	0.63(H) x 0.63(V)mm
Display Colors	1.07 Billion
Luminance of White	Typical 500 nits
Contrast Ratio (Full On/Off)	1000:1
Viewing Angle(CR>10)	178 (H), 178 (V)
Response Time	Typical 8 ms
Inputs	2 x DP 1.2 (3840x2160@60Hz)
	2 x HDMI 2.0 [3840x2160@60Hz]
	1 x USB 2.0 Type-A (for Service purposes)
	2 x Ethernet RJ45 – 1x in/1x out (RS232) for control
	1 x Ethernet RJ45 - LAN
Output	1 x ϕ 3.5mm – IR
Output	1 x DP 1.2 (3840x2160@60Hz)
Power Control	AC power ON/OFF switch
Wire Control	RS232C input, LAN
AC Power Input Range	100~240VAC, 50/60Hz
Power Consumption	On Mode : typical \leq 120W
	Standby Mode : < 0.5 W
Dimension (W x H x D)	1077.5 x 607.8 x 113.7mm, Net weight : 22.9Kg
Operating Temperature	0°C to 40°C
Storage Temperature	-10°C to +60°C
Working Humidity	20% - 85%, non-condensing
Backlight Operating Life	Min 50,000 hours

※ All specifications are subject to change without prior notice. Ver. 01 2021

Note: Recommend operating < 20 hrs per day. Long term static display will cause image sticking